


Product

LF34B2051P45-N97

Specification

Center Frequency[fo]	2051 MHz
Bandwidth[BW]	1946~2155 MHz
Insertion Loss in BW	≤4.0dB
Ripple in BW	≤1.1 dB (in band any 36MHz)
VSWR in BW	≤2.0
Attenuation [Absolute Value]	≥36dB(1293~1576 MHz) ≥31dB(1600~1848 MHz) ≥22dB(2250~3000 MHz)
In/Out Impedance	50Ω
Input Power	1 w max.

Dimension (mm)

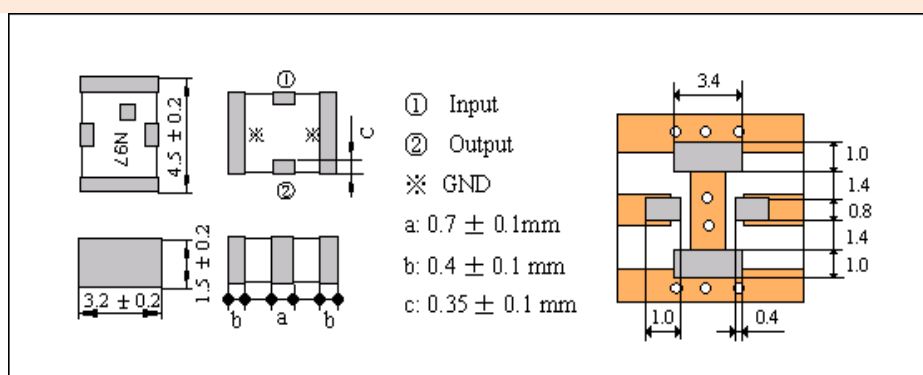

Test Graph

