

Product

LF21B2450H72-N176

Specification

Center Frequency[fo]

2450 MHz

Bandwidth[BW]

2400~2500 MHz

Insertion Loss in BW

≤1.5dB

VSWR in BW

≤2.0

**Attenuation
[Absolute Value]**

≥25dB (1200~1300MHz)
 ≥10dB (2000MHz)
 ≥12dB (3000MHz)
 ≥30dB (3600~3800MHz)
 ≥34dB (4800~5000MHz)


In/Out Impedance

50Ω

Input Power

1 w max.

Dimension (mm)

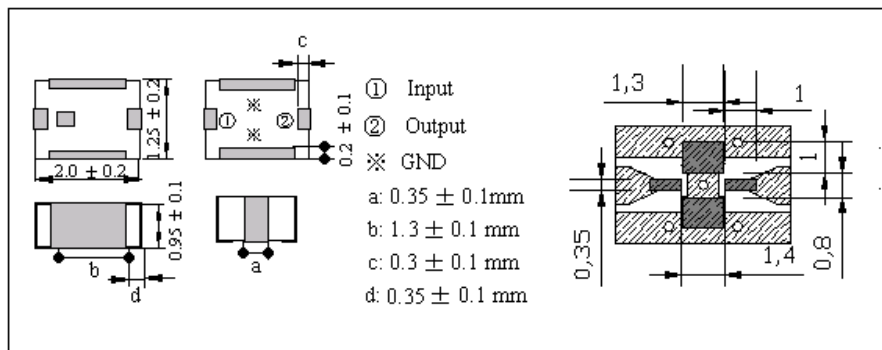

Test Graph

