

Product

LF43H1900P56-H01

Specification

Center Frequency[fo]

1900 MHz

Bandwidth[BW]

1650~2150 MHz

Insertion Loss in BW

≤2.0dB

VSWR in BW

≤2.0

Attenuation
[Absolute Value]

≤2.3 dB (at 1600MHz)
≥26.0 dB (950~1450MHz)


In/Out Impedance

50Ω

Input Power

1 w max.

Dimension (mm)

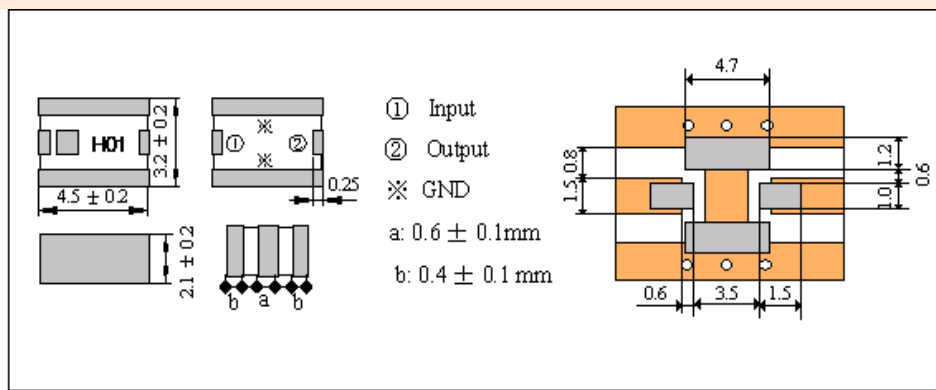

Test Graph

