


Product

DFM2140S60EB

Specification

Center Frequency[fo]	2140MHz
Bandwidth[BW]	±30.0MHz
Insertion Loss in BW	3.0 dB max.
Ripple in BW	1.0 dB max.
VSWR in BW	1.5:1 max.
Attenuation [Absolute Value]	45.0 min. @ fo -100 MHz 45.0 min. @ fo +100 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

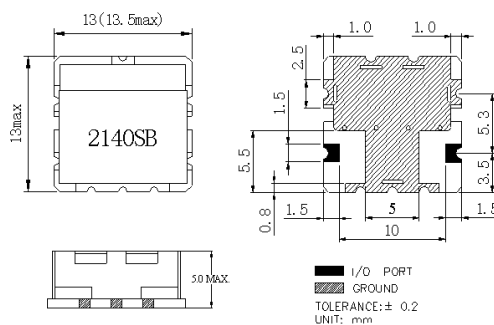

TEST GRAPH

