


Product	DFN944S20HA
Specification	
Center Frequency[fo]	944MHz
Bandwidth[BW]	±10MHz
Insertion Loss in BW	1.5 dB max.
Ripple in BW	1.0 dB max.
VSWR in BW	1.3:1max.
Attenuation [Absolute Value]	35.0 min @ 889 to 909 MHz
In/Out Impedance	50Ω
Input Power	3 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)



TEST GRAPH

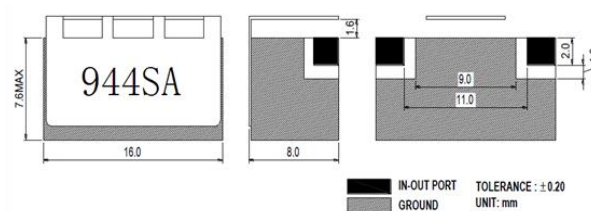