

## MOCA双工器



**DIP-2YFP-10021125N-XH Appearance:**



## Specification

|                      |              |
|----------------------|--------------|
| Low Pass Frequency   | 5~1002MHz    |
| High Pass Frequency  | 1125~1675MHz |
| Insertion Loss       | TYP:≤2.5dB   |
| Return Loss          | TYP:≥12 dB   |
| Stopband Attenuation | TYP:≥40 dB   |
| Isolation            | TYP:≥40 dB   |
| In/output Impedance  | 75Ω          |

**Dimension (mm)**

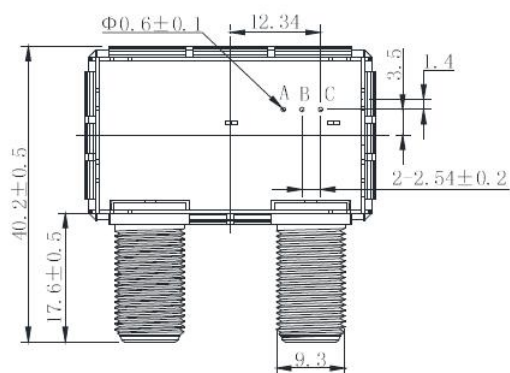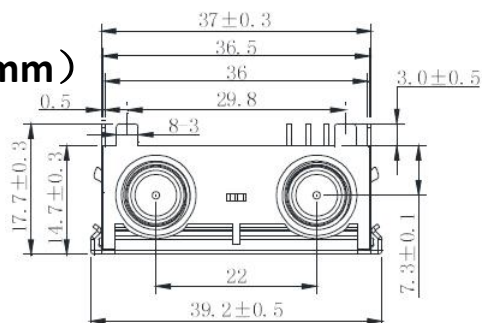

注:

1. B:HP信号端; A、C:接地;
2. F头: 英制, 锌合金;
3. 壳体材料: 马口铁  $\delta 0.5$ ;
4. 上盖材料: 马口铁  $\delta 0.3$ ;
5. 未注公差  $\pm 0.2\text{mm}$ 。

