

模拟板


DIP-3A2MFH-6587 Appearance:



Specification

Low Pass Frequency	7.5~65 MHz
High Pass Frequency	87~860MHz
Insertion Loss	TYP: ≤1.1dB （at 7.5~65MHz）
	TYP: ≤1.0 dB （at 87~500MHz）
	TYP: ≤1.5 dB （at 500~860MHz）
Return Loss	TYP: ≥16 dB
Stopband Attenuation	TYP: ≥50 dB
In/output Impedance	75Ω
Through current	3A (DC)

Dimension (mm)

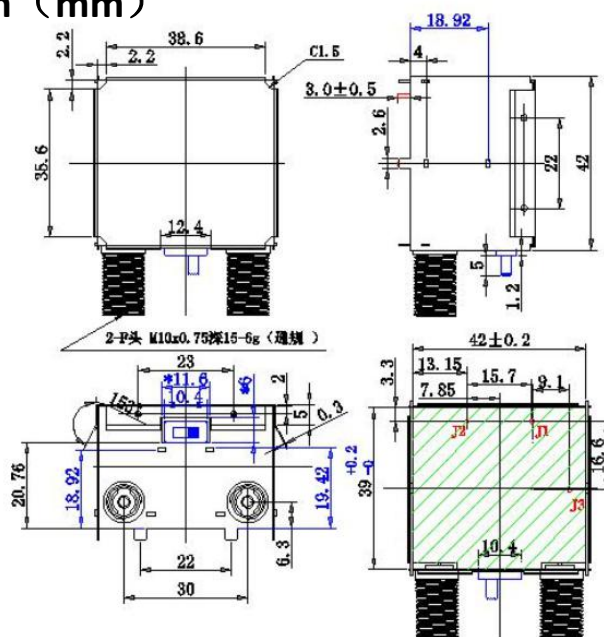

- 1、未注公差按GB/T1804-m;
- 2、拨动开关伸出长度为 $\pm 0.2\text{mm}$
- 3、针端子 $1.0\text{mm} \pm 0.1\text{mm}$
- 4、J3取电脚, J2低通信号脚, J1接地脚