


Product

DFC555B30A

Specification

Center Frequency[fo]	555MHz
Bandwidth[BW]	±15.0MHz
Insertion Loss in BW	2.5 dB max.
Ripple in BW	1.0 dB max.
VSWR in BW	1.7:1max.
Attenuation [Absolute Value]	15.0 min.@ 626 MHz 25.0 min.@ 484 MHz 40.0 min.@ 335 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40℃ ~ +85 ℃

Dimension (mm)

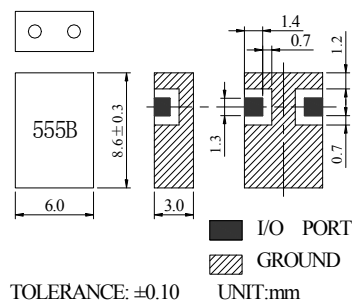

TEST GRAPH

