


Product

DFM1722W25FA

Specification

Center Frequency[fo]	1722.5MHz
Bandwidth[BW]	±12.5MHz
Insertion Loss in BW	4.0 dB max.
Ripple in BW	1.5 dB max.
VSWR in BW	1.4:1max.
Attenuation [Absolute Value]	6.0 min. @ fo+20 MHz 50.0 min. @ fo-55 MHz 45.0 min. @ fo+55 MHz
In/Out Impedance	50Ω
Input Power	3 w max.
Operation Temperature	-40℃ ~ +85 ℃

Dimension (mm)

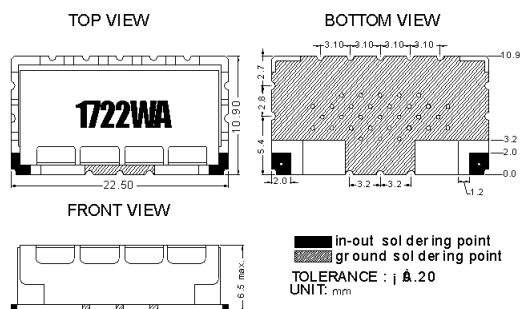

TEST GRAPH

