


**Product****DFC1740HP410A**

**Specification**

|                                     |                     |
|-------------------------------------|---------------------|
| <b>Cut-off Frequency</b>            | 1740.0MHz           |
| <b>Bandwidth[BW]</b>                | 410MHz              |
| <b>Insertion Loss in BW</b>         | 3.5 dB max.         |
| <b>Ripple in BW</b>                 | 2.0 max.            |
| <b>VSWR (in BW)</b>                 | 3.0:1 max.          |
| <b>Attenuation [Absolute Value]</b> | 25.0 min.@ 1700 MHz |
| <b>In/Out Impedance</b>             | 50Ω                 |
| <b>Input Power</b>                  | 1 w max.            |
| <b>Operation Temperature</b>        | -40°C ~ +85 °C      |

**Dimension (mm)**

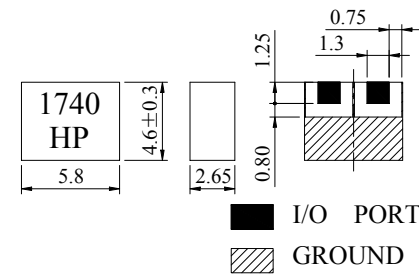

TOLERANCE:±0.2 UNIT:mm

**TEST GRAPH**

