


Product **DFB836S25DA**

Specification

Center Frequency[fo]	836.5MHz
Bandwidth[BW]	±12.5MHz
Insertion Loss in BW	3.0 dB max.
Ripple in BW	0.5 dB max.
VSWR in BW	1.5:1 max.
Attenuation [Absolute Value]	7.0 min.@ DC to 350 MHz 15.0 min.@ 869 to 894 MHz 50.0 min.@ fo ± 130 MHz 50.0 min.@ 1738 to 1788 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

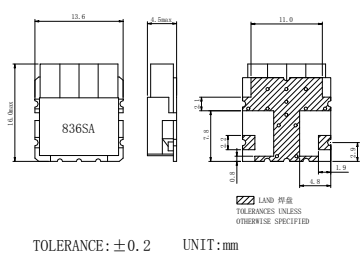

TEST GRAPH

