


Product**DFB1952S145DA**

Specification

Center Frequency[fo]	1952.5MHz
Bandwidth[BW]	±72.5MHz
Insertion Loss in BW	2.0dB max.
Ripple in BW	0.5dB max.
VSWR in BW	2.0: 1
Attenuation [Absolute Value]	30.0 min.@2400MHz 30.0 min.@4000MHz
In/Out Impedance	50Ω
Input Power	1w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

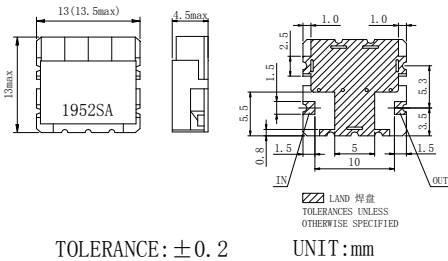

TEST GRAPH

