


Product

DFD2620S50EA

Specification

Center Frequency[fo]	2620.0MHz
Bandwidth[BW]	±25.0MHz
Insertion Loss in BW	2.2dB max.
Ripple in BW	0.5dB max.
Return Loss in BW	16.0 dB min.
Attenuation [Absolute Value]	5.0 min.@fo±55MHz 40.0 min.@fo±120MHz 38.0 min.@fo±138.24MHz
In/Out Impedance	50Ω
Input Power	1w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

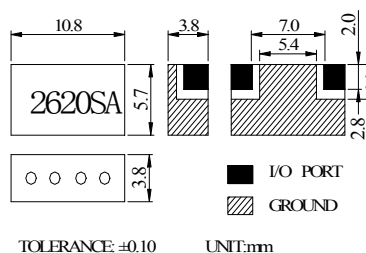

TEST GRAPH

