


Product **DFD3470S40EA**

Specification

Center Frequency[fo]	3470.0MHz
Bandwidth[BW]	±50.0MHz
Insertion Loss in BW	2.0dB max.
Ripple in BW	1.0dB max.
VSWR in BW	1.5:1
Attenuation [Absolute Value]	15 min. @ 3300~3370 MHz 15 min. @ 3570~3700 MHz
In/Out Impedance	50Ω
Input Power	1w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

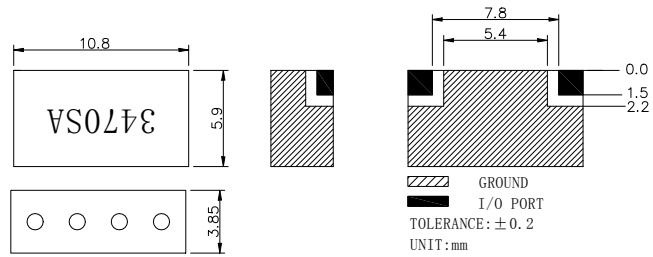

TEST GRAPH

