



**Product** **DFD5235S180DF**

**Specification**

<b>Center Frequency[fo]</b>	5235.0MHz
<b>Bandwidth[BW]</b>	±90MHz
<b>Insertion Loss in BW</b>	2.5 dB max.
<b>Ripple in BW</b>	1.3 dB max.
<b>Return Loss in BW</b>	10.0 dB min.
<b>Attenuation [Absolute Value]</b>	50.0 min @ 5490 to 5850 MHz
<b>In/Out Impedance</b>	50Ω
<b>Input Power</b>	1 w max.
<b>Operation Temperature</b>	-40℃ ~ +85 ℃

**Dimension (mm)**

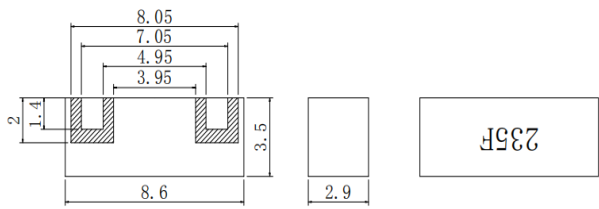



Dimensions in mm  
Tolerance: ±0.25

**TEST GRAPH**

