


Product **DFD5250S160DC**

Specification

Center Frequency[fo]	5250.0MHz
Bandwidth[BW]	±80MHz
Insertion Loss in BW	2.3 dB max.
Ripple in BW	1.2 dB max.
VSWR in BW	1.67:1max.
Attenuation [Absolute Value]	40.0 min.@ 5490 to 5835 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

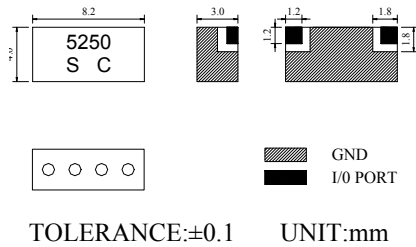

TEST GRAPH

