


**Product** **DFF1235P44DA**

**Specification**

<b>Center Frequency[fo]</b>	1235MHz
<b>Bandwidth[BW]</b>	±22MHz
<b>Insertion Loss in BW</b>	1.0 dB max.
<b>Ripple in BW</b>	0.3 dB max.
<b>VSWR in BW</b>	1.5:1 max.
<b>Attenuation [Absolute Value]</b>	25.0 min.@ 1559 to 1615 MHz
<b>In/Out Impedance</b>	50Ω
<b>Input Power</b>	1 w max.
<b>Operation Temperature</b>	-40°C ~ +85 °C

**Dimension (mm)**

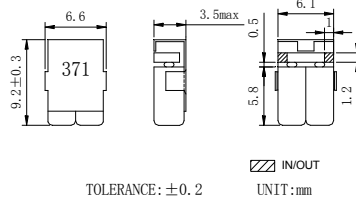

**TEST GRAPH**

