


Product **DFF1268P40DB**

Specification

Center Frequency[fo]	1268MHz
Bandwidth[BW]	±20.0MHz
Insertion Loss in BW	0.7 dB max.
Ripple in BW	0.3 dB max.
VSWR in BW	2.0:1max.
Attenuation [Absolute Value]	15.0 min. @ 1518.0 MHz 15.0 min. @ 1018.0 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

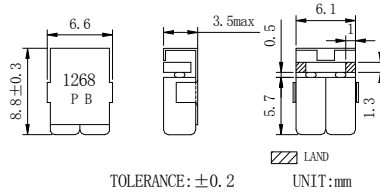

TEST GRAPH

