


Product

DFM1962L65HA

Specification

Center Frequency[fo]	1962.5MHz
Bandwidth[BW]	±32.5MHz
Insertion Loss in BW	5.5dB max.
Ripple in BW	3.5 dB max.
Return Loss in BW	13.0 dB min.
Attenuation [Absolute Value]	25.0dBmin.@1922.5MHz 60.0dBmin.@1850-1910MHz
In/Out Impedance	50Ω
Input Power	2 w max.
Operation Temperature	-40℃ ~ +85 ℃

Dimension (mm)

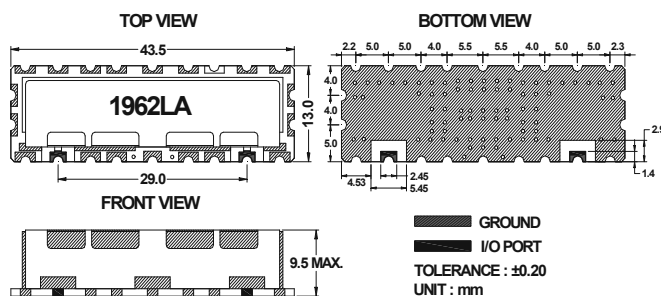

TEST GRAPH

