


Product**DFM2140Y60GA**

Specification

Center Frequency[fo]	2140MHz
Bandwidth[BW]	±30.0MHz
Insertion Loss in BW	6.0 dB max.
Ripple in BW	3.5 dB max.
VSWR in BW	1.7:1max.
Attenuation [Absolute Value]	8.0 dB min. @ fo ± 32.7 MHz 10.0 dB min. @ fo ± 33.5 MHz 30.0 dB min. @ fo ± 42.5 MHz
In/Out Impedance	50Ω
Input Power	3 w max.
Operation Temperature	-40°C ~ +85 °C

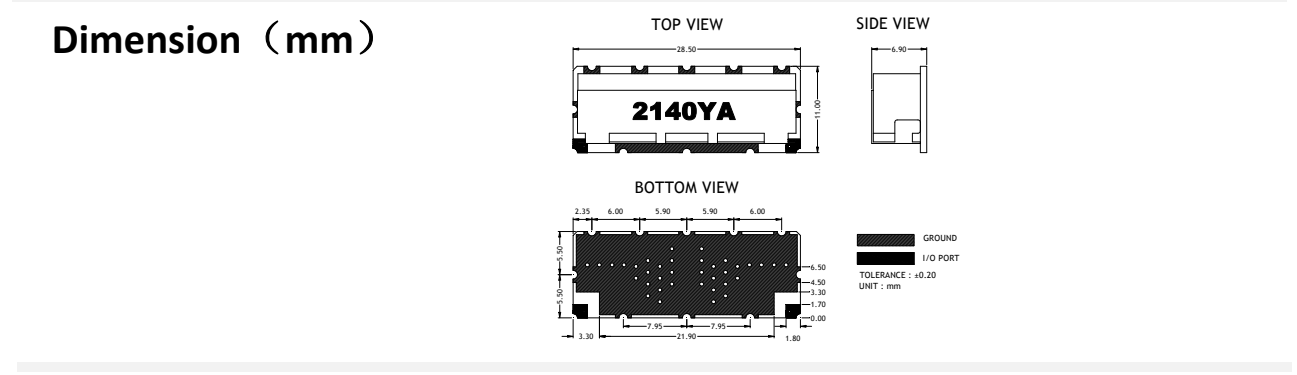

TEST GRAPH

