


Product

DFM2345S50EC

Specification

Center Frequency[fo]	2345MHz
Bandwidth[BW]	±25MHz
Insertion Loss in BW	2.0 dB max.
Ripple in BW	1.5 dB max.
VSWR in BW	1.4:1max.
Attenuation [Absolute Value]	40min. @1920 to 2170MHz 40min. @2555 to 2655MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40℃ ~ +85 ℃

Dimension (mm)

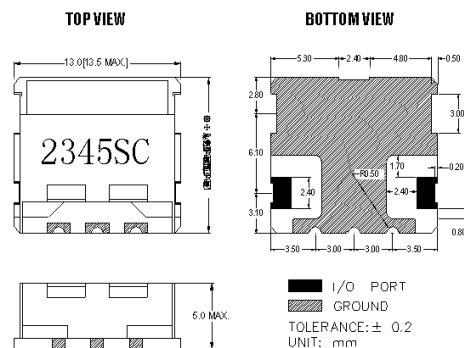

TEST GRAPH

