


Product **DFM2492R10GB**

Specification

Center Frequency[fo]	2492MHz
Bandwidth[BW]	±5.0MHz
Insertion Loss in BW	1.2 dB max.
Ripple in BW	0.3 dB max.
VSWR in BW	1.5:1 max.
Attenuation [Absolute Value]	8.0 min. @ f0 ± 100MHz 20.0 min. @ f0 ± 200MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

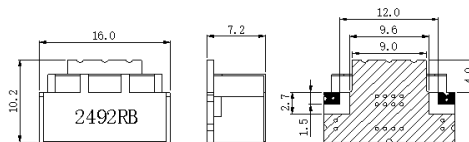

GROUND TOLERANCE: ±0.20
 I/O PORT UNIT: mm

TEST GRAPH

