


**Product** **DFN5250S160DA**

**Specification**

<b>Center Frequency[fo]</b>	5250.0MHz
<b>Bandwidth[BW]</b>	±80MHz
<b>Insertion Loss in BW</b>	3.0 dB max.
<b>Ripple in BW</b>	1.2 dB max.
<b>VSWR in BW</b>	1.67:1max.
<b>Attenuation [Absolute Value]</b>	50.0 min. @ 5490 to 5835 MHz
<b>In/Out Impedance</b>	50Ω
<b>Input Power</b>	1 w max.
<b>Operation Temperature</b>	-40°C ~ +85 °C

**Dimension (mm)**

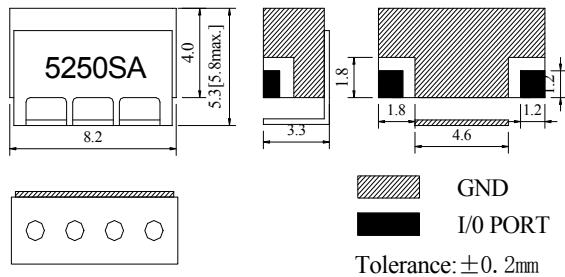

**TEST GRAPH**

