


Product**DFN5662S345DA**

Specification

Center Frequency[fo]	5662.5MHz
Bandwidth[BW]	±172.5MHz
Insertion Loss in BW	3.0 dB max.
Ripple in BW	1.5 dB max.
VSWR in BW	1.67:1max.
Attenuation [Absolute Value]	50.0 min. @ 5170 to 5330 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

Dimension (mm)

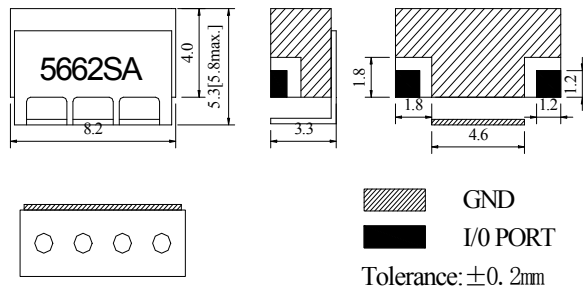

TEST GRAPH

