


Product

DDM12A1995-2185L30A

Specification

ITEM	CH1	CH2
Center Frequency[fo]	1995.0MHz	2185.0MHz
Bandwidth[BW]	±15.0MHz	±15.0MHz
Insertion Loss in BW	1.0 dB max.	1.0 dB max.
Ripple in BW	0.5 dB max.	0.5 dB max.
VSWR in BW	1.3:1 max.	1.3:1 max.
Attenuation [Absolute Value]	60.0 min. @ 2170 to 2200 MHz	60.0 min. @ 1980 to 2010 MHz
In/Out Impedance	50Ω	
Input Power	20 w max.	
Operation Temperature	-40°C ~ +85 °C	

Dimension (mm)

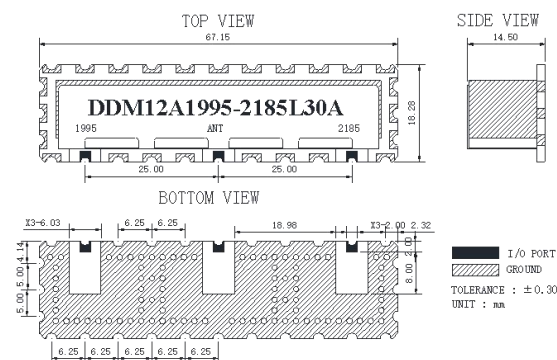

Product

DDM12A1995-2185L30A

TEST GRAPH

