


Product

DDM08A912/957L06A1

Specification

| ITEM | CH1 | CH2 |
|---------------------------------|----------------------------|----------------------------|
| Center Frequency[fo] | 912.0MHz | 957.0MHz |
| Bandwidth[BW] | ±3MHz | ±3MHz |
| Insertion Loss in BW | 2.0 dB max. | 2.0 dB max. |
| Ripple in BW | 1.0 dB max. | 1.0 dB max. |
| VSWR in BW | 1.4:1 max. | 1.4:1 max. |
| Attenuation [Absolute Value] | 55.0 min. @ 954 to 960 MHz | 55.0 min. @ 909 to 915 MHz |
| In/Out Impedance | 50Ω | |
| Input Power | 5 w max. | |
| Operation Temperature | -40°C ~ +85 °C | |

Dimension (mm)

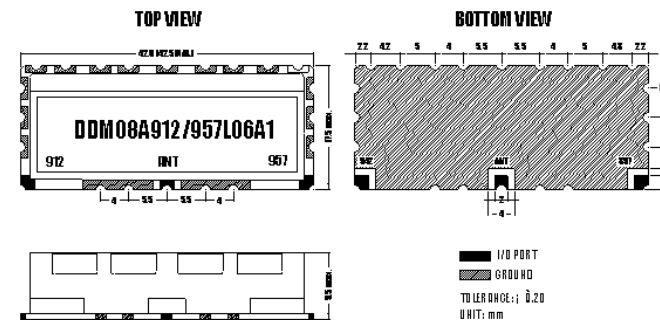

Product

DDM08A912/957L06A1

TEST GRAPH

