


Product

DDM08A707-737L18A

Specification

ITEM	CH1	CH2
Center Frequency[fo]	707.0MHz	737.0MHz
Bandwidth[BW]	±9MHz	±9MHz
Insertion Loss in BW	2.8 dB max.	2.8 dB max.
Ripple in BW	1.5 dB max.	1.5 dB max.
VSWR in BW	1.4:1 max.	1.4:1 max.
Attenuation [Absolute Value]	50.0 min. @ 728 to 746 MHz 10.0 min. @ 722 MHz	50.0 min. @ 698 to 716 MHz 10.0 min. @ 722 MHz
In/Out Impedance	50Ω	
Input Power	5 w max.	
Operation Temperature	-40°C ~ +85 °C	

Dimension (mm)

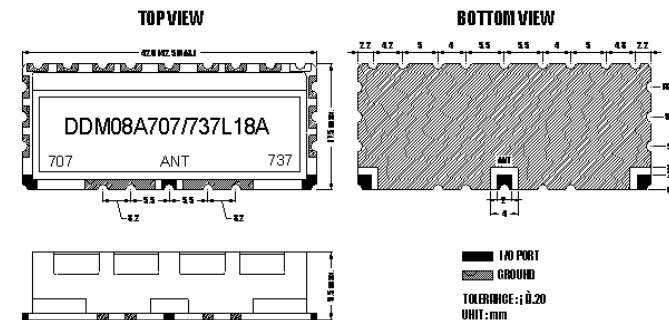

Product

DDM08A707-737L18A

TEST GRAPH

