


Product

DDM04A1960/1880L60B

Specification

ITEM	CH1	CH2
Center Frequency[fo]	1960.0MHz	1880.0MHz
Bandwidth[BW]	±30.0MHz	±30.0MHz
Insertion Loss in BW	5.0 dB max.	5.0 dB max.
Ripple in BW	4.0 dB max.	4.0 dB max.
VSWR in BW	1.5:1 max.	1.5:1 max.
Attenuation [Absolute Value]	40.0 min. @ 1850 to 1910 MHz 20.0 min. @ 1920 MHz	40 min. @ 1930 to 1990 MHz 20 min. @ 1920 MHz
In/Out Impedance	50Ω	
Input Power	3 w max.	
Operation Temperature	-40°C ~ +85 °C	

Dimension (mm)

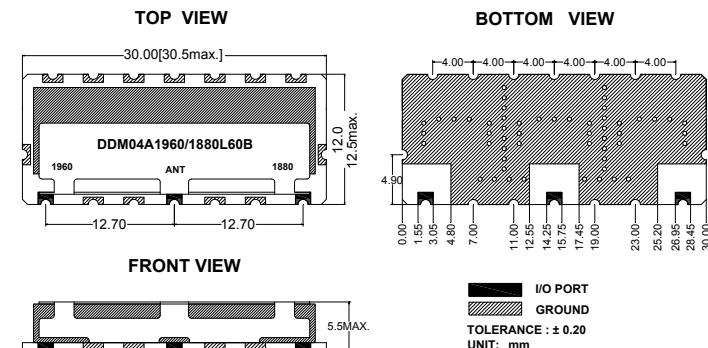

Product

DDM04A1960/1880L60B

TEST GRAPH

