


**Product**

**DDM04A751-782L10B**

**Specification**

ITEM	CH1	CH2
Center Frequency[fo]	751.0MHz	782.0MHz
Bandwidth[BW]	±5MHz	±5MHz
Insertion Loss in BW	3.5 dB max.	3.8 dB max.
Ripple in BW	1.2 dB max.	1.2 dB max.
VSWR in BW	1.5:1 max.	1.5:1 max.
Attenuation [Absolute Value]	50.0 min. @ 777 to 787 MHz 15.0 min. @ 766.5 MHz	50.0 min. @ 746 to 756 MHz 15.0 min. @ 766.5 MHz
In/Out Impedance	50Ω	
Input Power	3 w max.	
Operation Temperature	-40°C ~ +85 °C	

**Dimension (mm)**

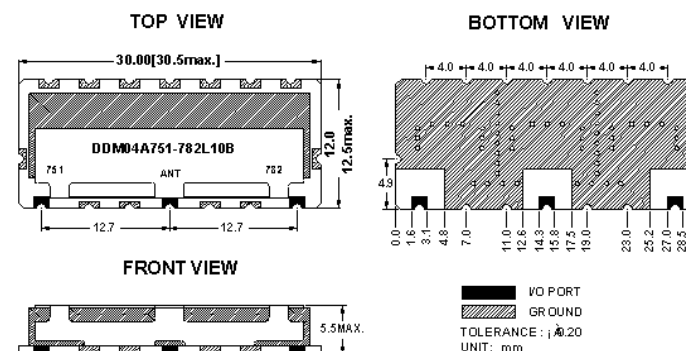

Product

DDM04A751-782L10B

TEST GRAPH