


**Product**

**DDM08A2535/2655L70A3**

**Specification**

ITEM	CH1	CH2
Center Frequency[fo]	2535.0MHz	2655.0MHz
Bandwidth[BW]	±35.0MHz	±35.0MHz
Insertion Loss in BW	3.0 dB max.	3.0 dB max.
Ripple in BW	2.0 dB max.	2.0 dB max.
VSWR in BW	1.5:1 max.	1.5:1 max.
Attenuation [Absolute Value]	45.0 min. @ 2620 to 2690 MHz 30.0 min. @ 2595 MHz	45.0 min. @ 2500 to 2535 MHz 50.0 min. @ 2535 to 2570 MHz 30.0 min. @ 2595 MHz
In/Out Impedance	50Ω	
Input Power	5 w max.	
Operation Temperature	-40°C ~ +85 °C	

**Dimension (mm)**

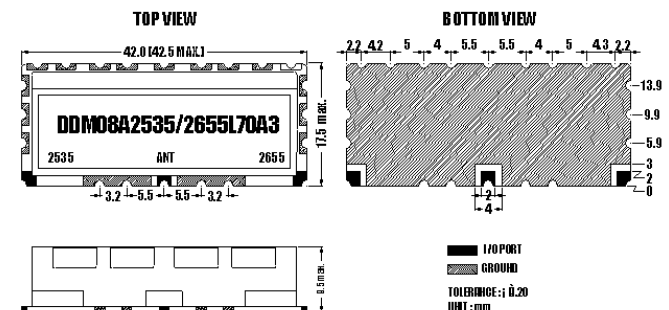

Product

DDM08A2535/2655L70A3

TEST GRAPH

