

Product


DDM08A1950/2140L60A

Specification

5

ITEM	CH1	CH2
Center Frequency[fo]	1950.0MHz	2140.0MHz
Bandwidth[BW]	±30.0MHz	±30.0MHz
Insertion Loss in BW	1.8 dB max.	1.8 dB max.
Ripple in BW	0.8 dB max.	0.8 dB max.
VSWR in BW	1.3:1 max.	1.3:1 max.
Attenuation [Absolute Value]	50.0 min. @ 2110 to 2170 MHz 38.0 min. @ 2045 MHz	50 min. @ 1920 to 1980 MHz 38 min. @ 2045 MHz
In/Out Impedance	50Ω	
Input Power	8 w max.	
Operation Temperature	-40°C ~ +85 °C	

Dimension (mm)

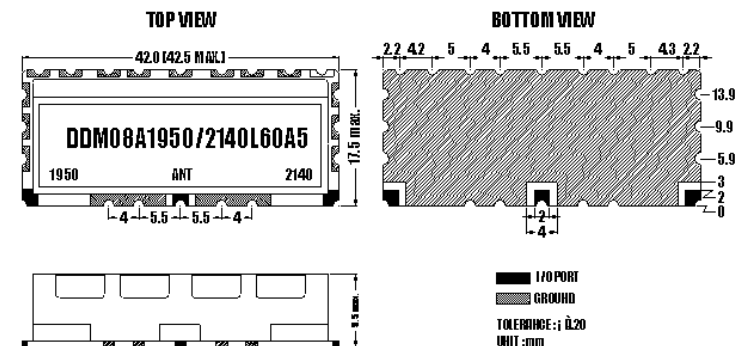

Product

DDM08A1950/2140L60A5

TEST GRAPH

