


Product

DM6G2181R6G921PA

Specification

ITEM	CH1	CH2	CH3	CH4
Center Frequency[fo]	899.0MHz	944.0MHz	2017.5MHz	2345.0MHz
Bandwidth[BW]	±10MHz	±10MHz	±7.5MHz	±25MHz
Insertion Loss in BW	2.0 dB max.	2.0 dB max.	2.0 dB max.	2.0 dB max.
Ripple in BW	1.0 dB max.	1.0 dB max.	1.0 dB max.	1.0 dB max.
Return Loss in BW	18dB min.	18dB min.	18dB min.	18dB min.
Attenuation [Absolute Value]	55min.@2010~2025 MHz 55min.@2320~2370 MHz 60min.@934~954 MHz	55min.@2010~2025 MHz 55min.@2320~2370 MHz 60min.@889~909 MHz	55min.@889~954 MHz 50min.@2320~2370 MHz	55min.@889~954 MHz 55min.@2010~2025MHz
In/Out Impedance	50Ω			
Input Power	3 w max.			
Operation Temperature	-40°C ~ +85 °C			

Dimension (mm)

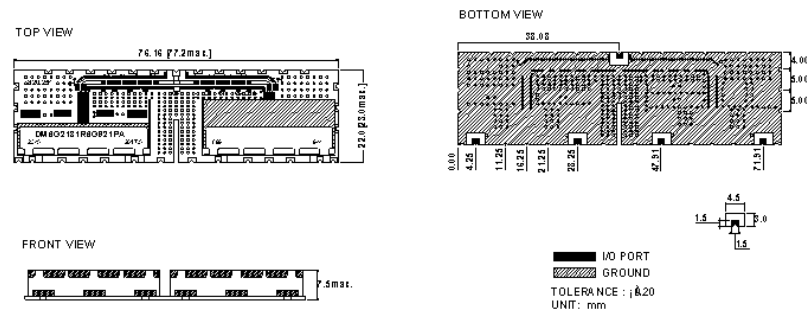

Product

DM6G2181R6G921PA

TEST GRAPH

