


Product

DM3A1420R4G2090PB

Specification

ITEM	CH1	CH2	CH3
Center Frequency[fo]	1420MHz	2185MHz	1995MHz
Bandwidth[BW]	±160MHz	±15MHz	±15MHz
Insertion Loss in BW	3.0 dB max.	3.0 dB max.	3.0 dB max.
Ripple in BW	1.5 dB max.	1.0 dB max.	1.0 dB max.
Return Loss in BW	9.5dB min.	14.0dB min.	14.0dB min.
Attenuation [Absolute Value]	45@1980~2010MHz 45@2170~2200MHz	50@1260~1580MHz 50@1980~2010MHz	50@1260~1580MHz 50@2170~2200MHz
In/Out Impedance	50Ω		
Input Power	3 w max.		
Operation Temperature	-40℃ ~ +85℃		

Dimension (mm)

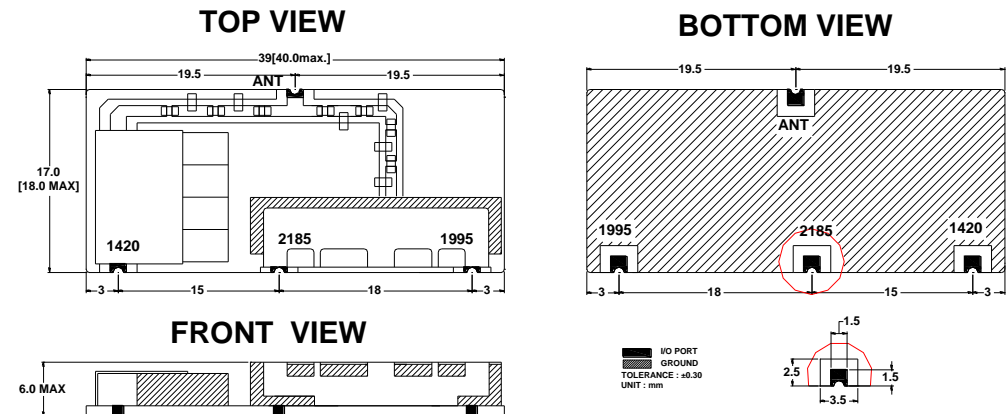

Product

DM6G2181R6G921PA

TEST GRAPH

