


Product:

CMTS双工器

DIP-3MCG-4254 Appearance:

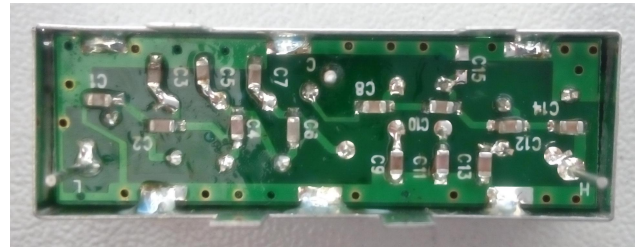

Specification

Low Pass Frequency	0.3~42 MHz
High Pass Frequency	54~1000MHz
Insertion Loss	TYP:≤1.5 dB
Return Loss	≥18 dB
Stopband Attenuation	≥50 dB
Isolation	≥45 dB
In/output Impedance	75Ω

Dimension (mm)

