


Product**LD18D2450LAN-D25**

Specification

Frequency Range	2400~2500MHz\ 4900~5950MHz
Insertion Loss	≤0.6dB\ ≤0.85dB
V.S.W.R	≤1.8 \ ≤1.8
Attenuation(Lower Band)	≥23 dB (4800~5000 MHz) ≥20 dB (7200~7500MHz)
Attenuation(Higher Band)	≥25 dB (2400~2500 MHz) ≥20 dB (9800~11900 MHz)
In/Output Impedance	50Ω\50Ω
Isolation	≥28 dB (2400~2500 MHz) ≥21 dB (4900~5950 MHz)

Dimension (mm)

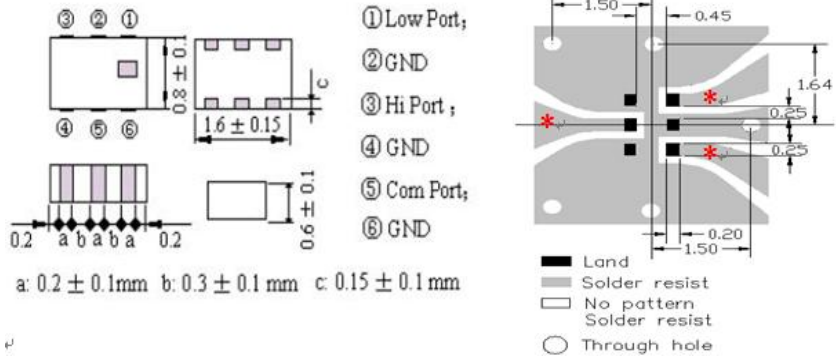

Test Graph

