


Product: LBF43M1200H920-M09/A

Specification

Frequency Range	950~1450MHz \ 200~750MHz \ 1650~2150MHz
Insertion Loss	≤3.5dB \ ≤2.5dB \ ≤2.5dB
Ripple (in BW)	≤2.2dB \ ≤2.5dB \ ≤2.0dB
V.S.W.R	≤2.7 \ ≤2.3 \ ≤2.6
Attenuation	≥28 dB (200~750 MHz)
Attenuation	≥28 dB (1650~2150 MHz)
Attenuation	≥22 dB (950~1450 MHz)

Dimension (mm)

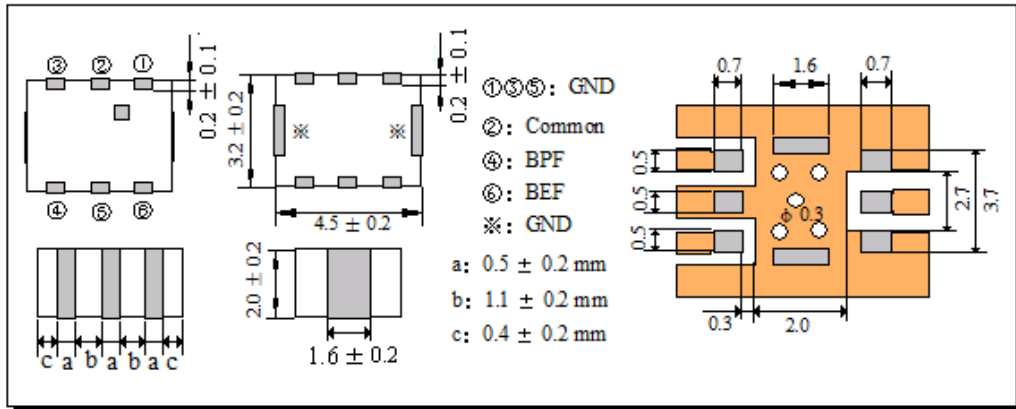

Test Graph

