


Product **LB18H2-2500B38**

Specification

Frequency Range	2300MHz~2700MHz
Insertion Loss	≤1.1dB
Unbalanced Impedance	50Ω
Balanced Impedance	100 Ω (50 Ω +50 Ω)
V.S.W.R	≤2.0
Amplitude Difference	≤2.0 dB
Phase Difference	180±10 deg

Dimension (mm)

PIN	Connection
1	Unbalanced port
2	DC or GND
3	Balanced port
4	Balanced port
5	GND
6	NC

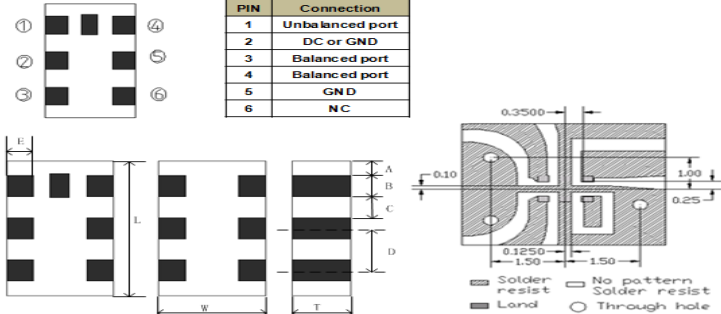

Symbol	L	W	T	A	B	C	D	E
Dimension (mm)	1.60±0.15	0.80±0.15	0.60±0.10	0.175±0.15	0.25±0.15	0.25±0.15	0.50±0.15	0.20±0.15

Test Graph

