


Product **LB21H1-1975B29**

Specification

Frequency Range	950MHz~3000MHz
Insertion Loss	≤1.7dB
Unbalanced Impedance	75Ω
Balanced Impedance	75Ω (37.5 Ω +37.5Ω)
V.S.W.R	≤2.0
Amplitude Difference	≤2.0 dB
Phase Difference	180±20 deg

Dimension (mm)

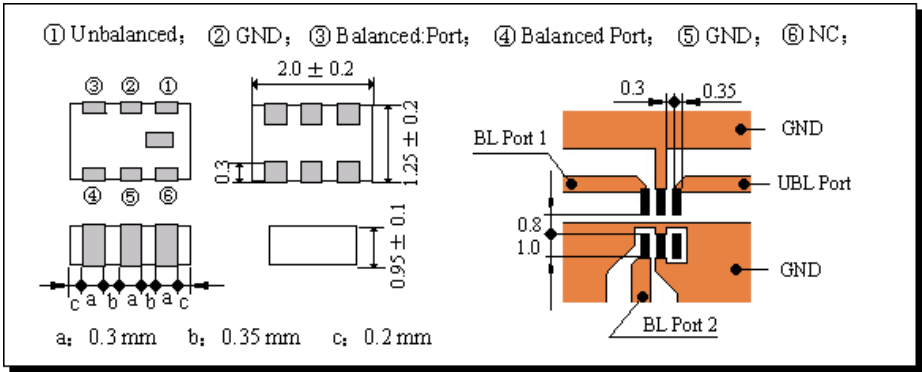

Test Graph

