


Product **LB21H1-2450B43**

Specification

Frequency Range	2400MHz~2500MHz
Insertion Loss	≤1.0dB
Unbalanced Impedance	50Ω
Balanced Impedance	50Ω (25 Ω +25 Ω)
V.S.W.R	≤2.0
Amplitude Difference	≤2.0 dB
Phase Difference	180±10 deg

Dimension (mm)

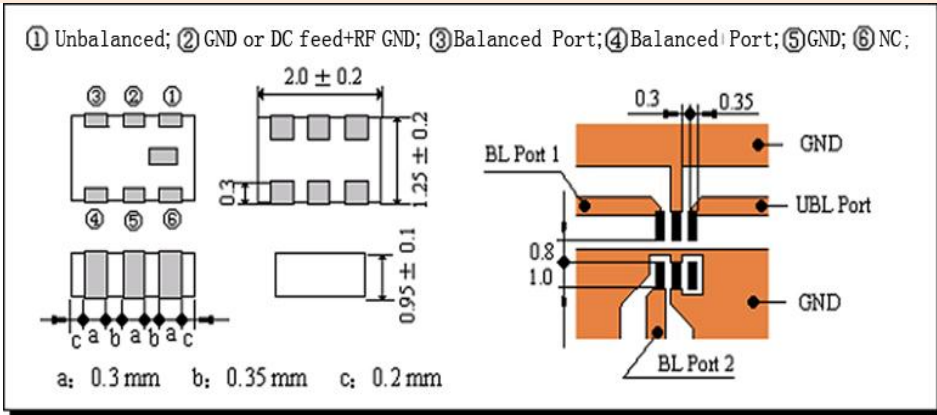

Test Graph

