


Product**LB21H2-1700B33**

Specification

Frequency Range	400MHz~3000MHz
Insertion Loss	≤2.5dB
Unbalanced Impedance	50Ω
Balanced Impedance	100 Ω (50 Ω +50 Ω)
V.S.W.R	≤2.0
Amplitude Difference	≤1.5 dB
Phase Difference	180 ± 15 deg

Dimension (mm)

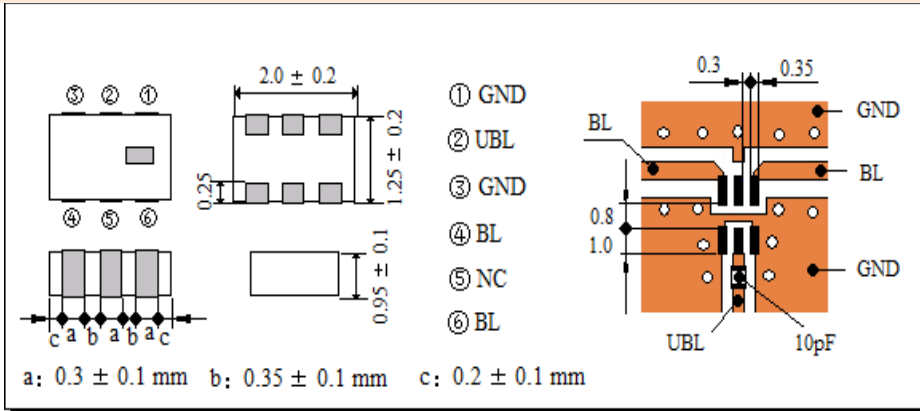

Test Graph

