


Product **LB21H2-2450B44**

Specification

Frequency Range	2400MHz~2500MHz
Insertion Loss	≤1.0dB
Unbalanced Impedance	50Ω
Balanced Impedance	100Ω (50 Ω +50 Ω)
V.S.W.R	≤2.0
Amplitude Difference	≤2.0 dB
Phase Difference	180±10 deg

Dimension (mm)

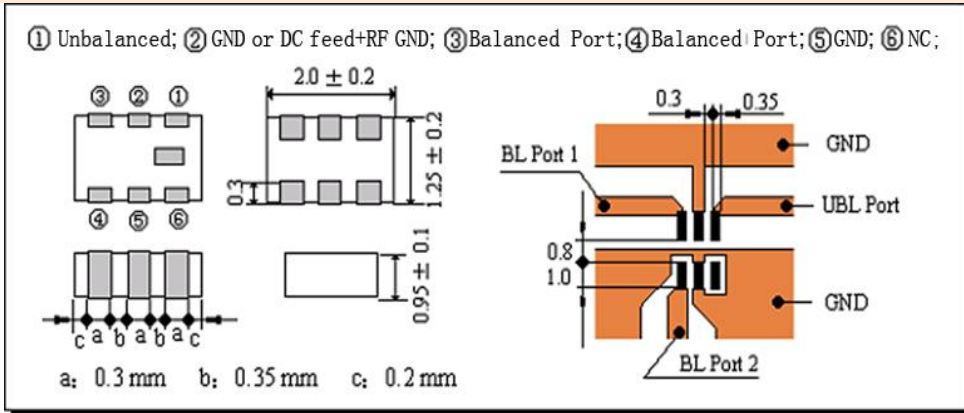

Test Graph

