


Product **LB21H2-5378B42**

Specification

Frequency Range	4900MHz~5800MHz
Insertion Loss	≤1.0dB
Unbalanced Impedance	50Ω
Balanced Impedance	100 Ω (50 Ω +50 Ω)
V.S.W.R	≤2.0
Amplitude Difference	≤2.0 dB
Phase Difference	180±10 deg

Dimension (mm)

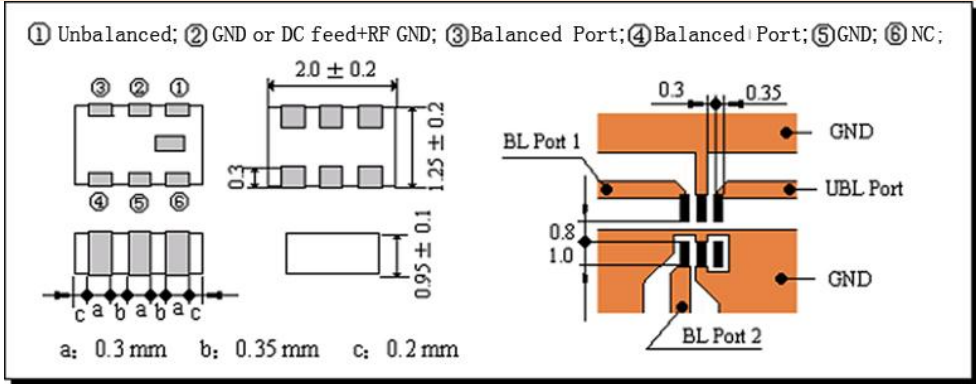

Test Graph

