


Product **LB21H4-0915&1915B39**

Specification

Frequency Range	869MHz~960MHz/1805MHz~2025MHz
Insertion Loss	≤1.1dB/ ≤ 1.8dB
Unbalanced Impedance	50Ω
Balanced Impedance	200 Ω (100 Ω +100 Ω)
V.S.W.R	≤2.0
Amplitude Difference	≤2.0 dB
Phase Difference	180±15 deg

Dimension (mm)

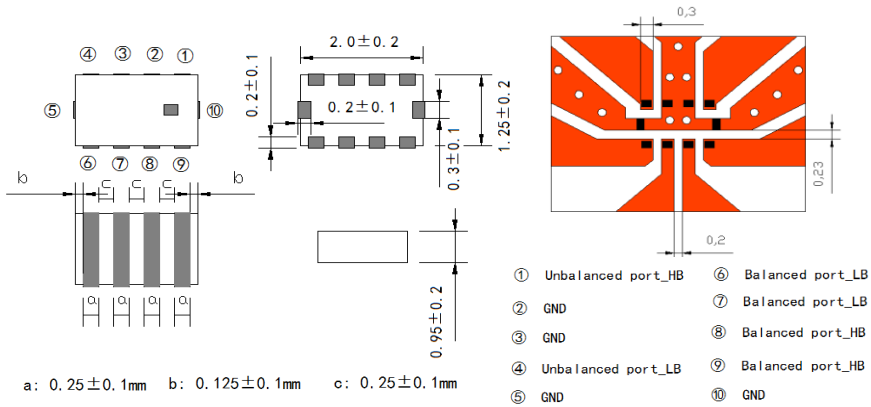

Test Graph

