


Product**LB21H4-1403B12**

Specification

Frequency Range	1279MHz~1526MHz
Insertion Loss	≤1.0dB
Unbalanced Impedance	50Ω
Balanced Impedance	200 Ω (100 Ω +100 Ω)
V.S.W.R	≤2.0
Amplitude Difference	≤2.0 dB
Phase Difference	180±10 deg

Dimension (mm)

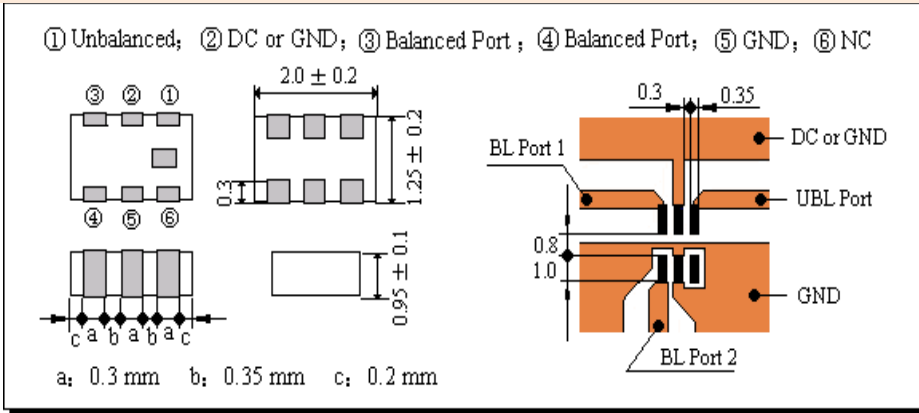

Test Graph

