


Product

LB21H4-1600B13

Specification

Frequency Range	1500MHz~1700MHz
Insertion Loss	≤0.8dB
Unbalanced Impedance	50Ω
Balanced Impedance	200 Ω (100 Ω +100 Ω)
V.S.W.R	≤2.0
Amplitude Difference	≤2.0 dB
Phase Difference	180 ± 10 deg

Dimension (mm)

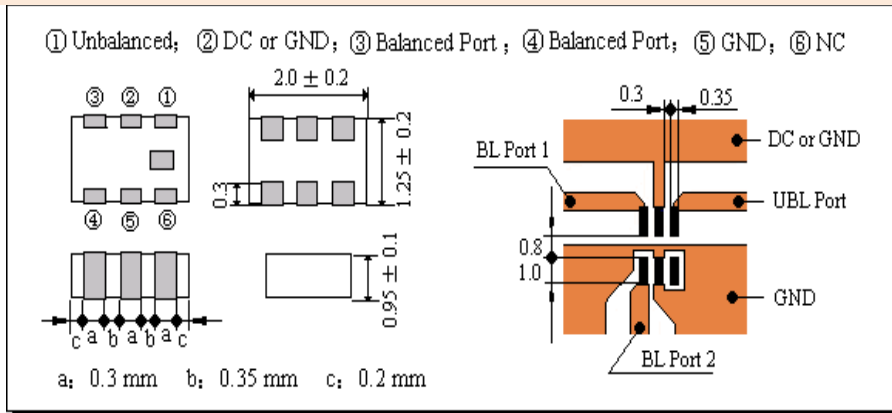

Test Graph

