


**Product**

**LB21H4-2060B14**

**Specification**

Frequency Range	1980MHz~2140MHz
Insertion Loss	≤0.8dB
Unbalanced Impedance	50Ω
Balanced Impedance	200 Ω (100 Ω +100 Ω)
V.S.W.R	≤2.0
Amplitude Difference	≤2.0 dB
Phase Difference	180±10 deg

**Dimension (mm)**

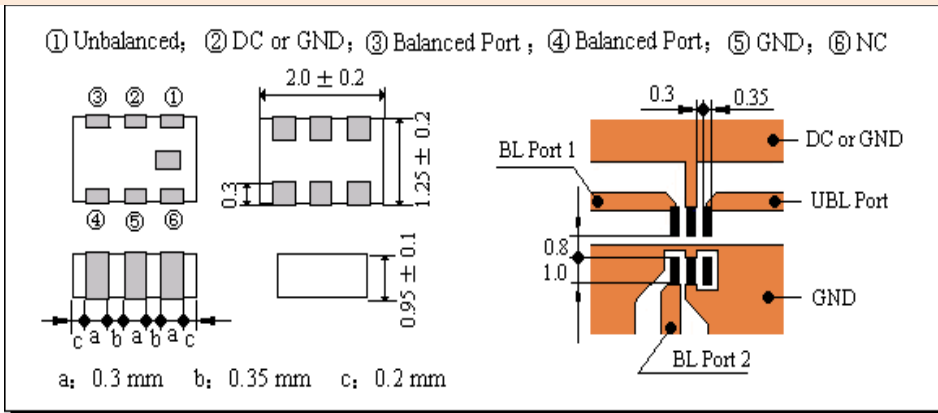

**Test Graph**

