


Product **LB21H15-1550B18**

Specification

Frequency Range	950MHz~2150MHz
Insertion Loss	≤1.3dB
Unbalanced Impedance	75Ω
Balanced Impedance	75Ω (37.5 Ω +37.5 Ω)
V.S.W.R	≤2.0
Amplitude Difference	≤2.0 dB
Phase Difference	180±10 deg

Dimension (mm)

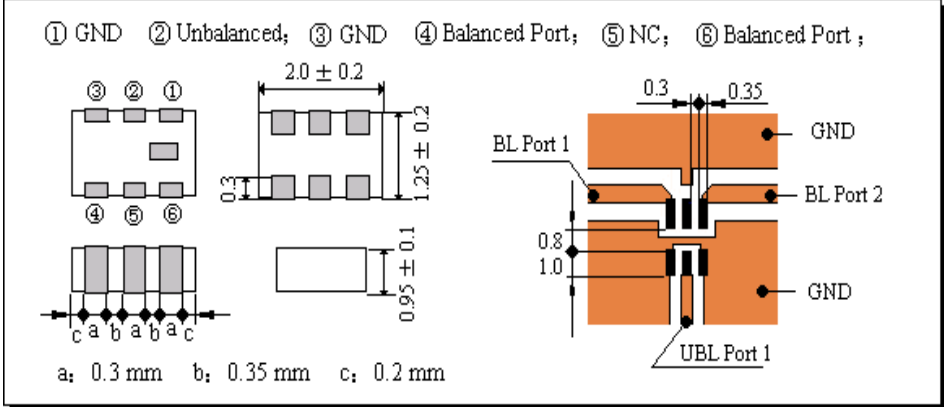

Test Graph

