


**Product: LBF21M2450H127-M37**

**Specification**

<b>Frequency Range</b>	2400MHz~2500MHz
<b>Insertion Loss</b>	≤1.5dB
<b>Return Loss</b>	≥9.5dB
<b>Attenuation Differential mode</b>	≥20dB (4800-5000 MHz) ≥20dB (7200-7500 MHz)
<b>Attenuation Common mode</b>	≥20dB (4800-5000 MHz)
<b>Amplitude Difference</b>	2.0dB max
<b>Phase Difference</b>	180±10 deg
<b>Differential Balanced Impedance</b>	Impedance match to the AT86RF230/231 and ATmega 128RFA1

**Dimension (mm)**

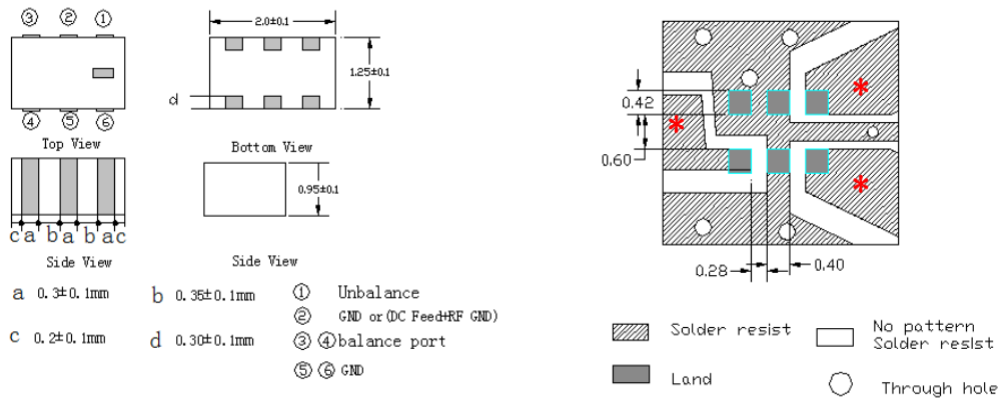

**Test Graph**

