


Product **LF34B2065P45-N87**

Specification

Center Frequency[fo]	2065 MHz
Bandwidth[BW]	1980~2150 MHz
Insertion Loss in BW	≤4.0dB
VSWR in BW	≤2.0
Attenuation [Absolute Value]	≥36dB (1335~1585 MHz) ≥33dB (1700~1870 MHz) ≥22dB (2250~3000 MHz)
In/Out Impedance	50Ω
Input Power	1 w max.

Dimension (mm)

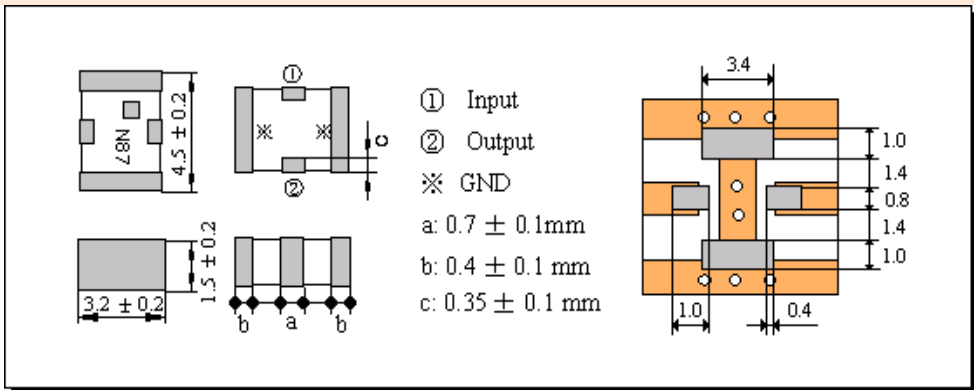

Test Graph

