


Product

PAM2450NN_KL01

Appearance

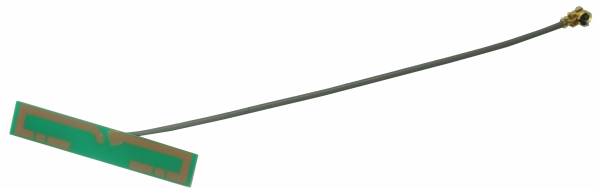

Specification

Frequency Range	2400-2500MHz
Azimuth	Omni-direction
Gain	1.5dBi
V.S.W.R	≤ 3.0 max
Polarization	Linear Polarization
Installation mode	Surface-pasting
Impedence	50 ohm

Dimension (mm)

